
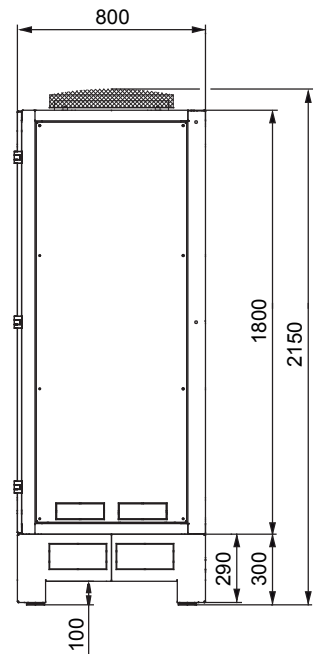


VARIAIR Central System - VACON II controller

mit Drehschieber-Vakuumpumpen KVT 3.140/0-400
oder K VX 3.140/0-400 für x-tra Betriebsstunden
with rotary vane vacuum pumps KVT 3.140/0-400
or K VX 3.140/0-400 for x-tra operating hours
avec pompes à vide à palettes KVT 3.140/0-400
ou K VX 3.140/0-400 pour les heures de travail x-tra
con pompe per vuoto a palettes KVT 3.140/0-400
o K VX 3.140/0-400 per x-tra ore operative

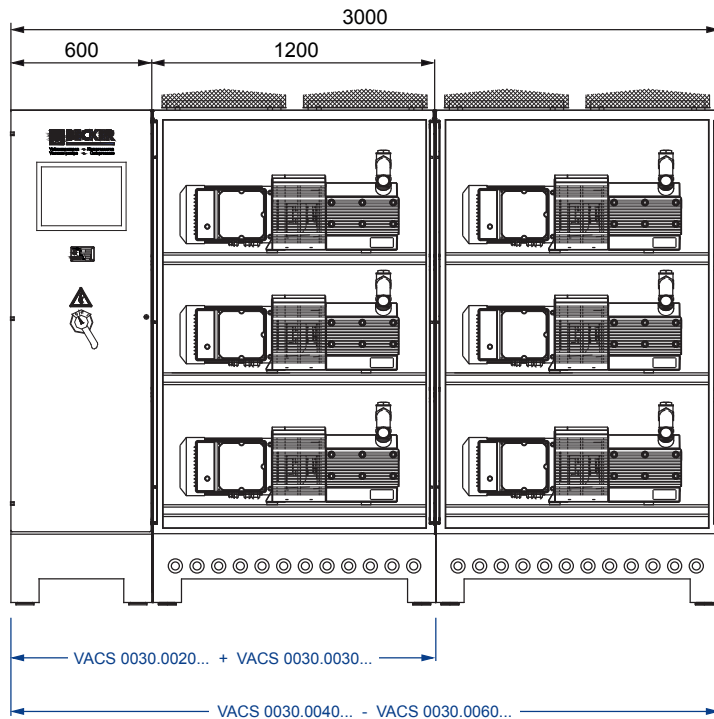

VARIAIR CENTRAL SYSTEM	m ³ /h	mbar	Geräteanzahl • Number of pumps • Nombre de pompes • Numero di pompe				Σ kW	V ²⁾	
	max.	max. (abs. ¹⁾)			KVT 3.140/0-400 K VX 3.140/0-400		max.	50/60 Hz	
VACS 0030.0020...	290	150			2		8,0	400 ±10%	
VACS 0030.0030...	435	150			3		12,0	400 ±10%	
VACS 0030.0040...	590	150			4		16,0	400 ±10%	
VACS 0030.0050...	725	150			5		20,0	400 ±10%	
VACS 0030.0060...	870	150			6		24,0	400 ±10%	

Drehschieber-Vakuumpumpen
Rotary vane vacuum pumps
Pompes à vide à palettes
Pompe per vuoto a palette

trockenlaufend, luftgekühlt
oil-free, air-cooled
fonctionnant à sec, refroidies par air
funzionandi a secco, raffreddate ad aria



m ³ /h (max.)	mbar (abs.)	kW (max.)	Hz	min ⁻¹
145	150	4,0	30 - 60	≤ 1700

