

DATA SHEET

VASF 2.80/1-0.XXXXXX BASIC


SIDE CHANNEL VACUUM PUMPS

single stage, air-cooled
frequency inverter


MAKE IT BECKER.



TYPE 1 – STANDARD

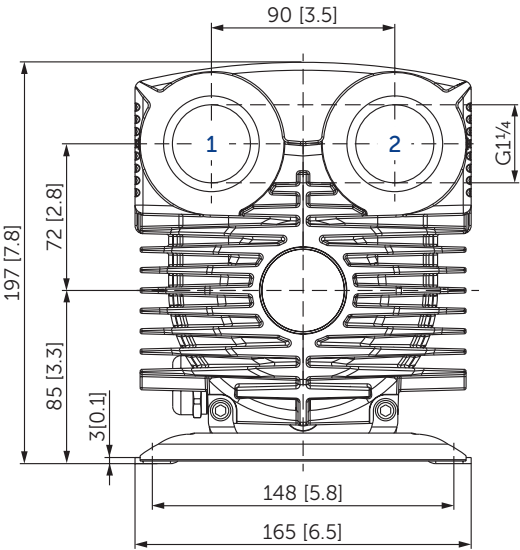

- 1 Vacuum connection (G 1¼)
- 2 Pressure connection (G 1¼)
- 3 SKINTOP MS-SC-M32x1.5 EMV
clamping range Ø 11–22 mm [0.4–0.9 inch]
- Dimensions in mm [inch]

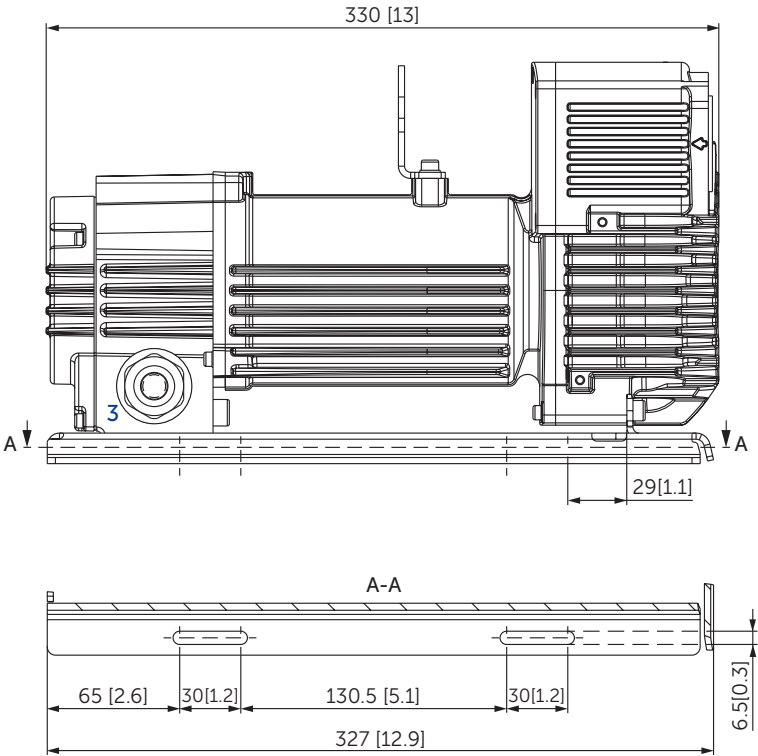




VASF 2.80/1	Suction air rate	Vacuum relative		Frequency	Emission sound pressure level ¹⁾	Weight			M 3~ U V W 3~ 1~ L N	A max.
		mbar max.	kPa max.			Type 1	Type 2	Type 3		
–0.AC230 BASIC	90	-190	-19	50–250	64 ²⁾ / 83 ³⁾	8.9	9.3	10.1	0.65 kW AC 1~ 200 V -10% ... 230 V +10% 50/60 Hz	6
–0.AC115 BASIC	90	-190	-19	50–250	63 ²⁾ / 76 ³⁾	8.9	9.3	10.1	0.64 kW AC 1~ 100 V -10% ... 115 V +10% 50/60 Hz	6
–0.DC048 BASIC	90	-170	-17	50–250	65 ²⁾ / 85 ³⁾	8.6	9.0	9.8	0.70 kW DC ~ 48 V ±20%	20

¹⁾ According to DIN EN ISO 11203, accuracy class of measurement: class 2, extended measurement uncertainty: 3 dB, 1 m [39.4 inch] distance

²⁾ With silencers, both sides piped (pressure and vacuum)

³⁾ Without silencers, consumer side piped (vacuum), other side open (pressure)

▪ Frequency inverters including mains filter; for more information about the frequency inverters, see the instructions

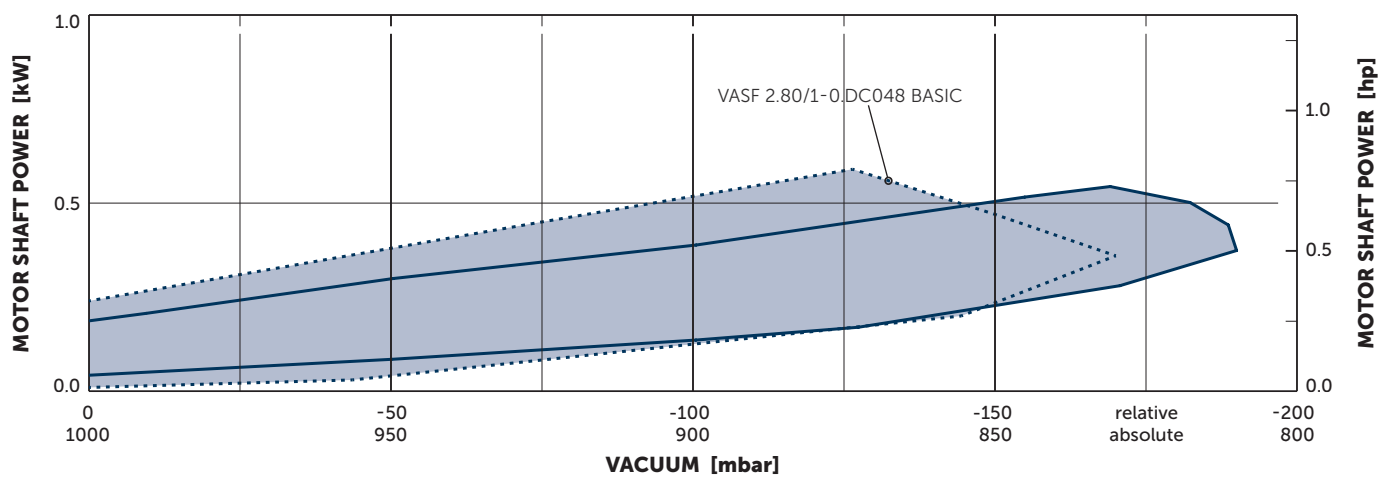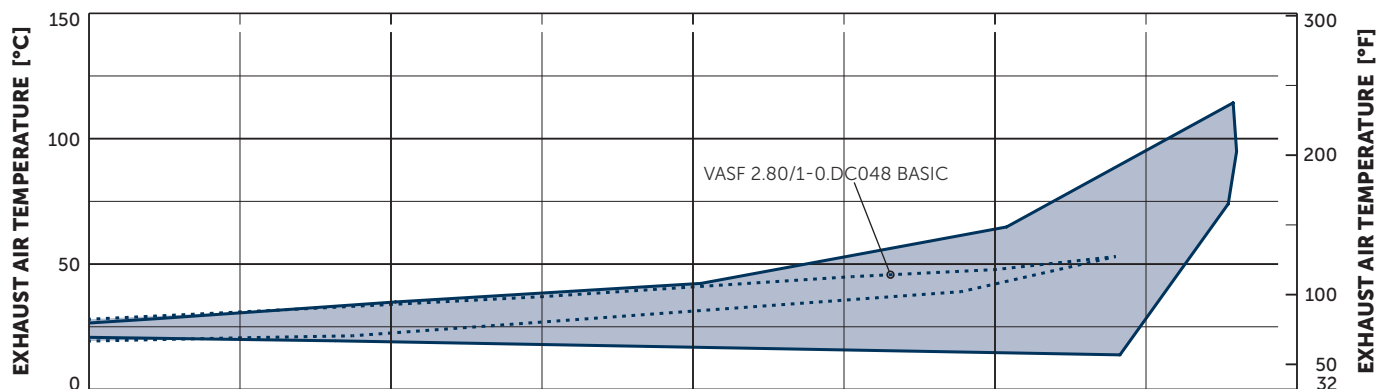
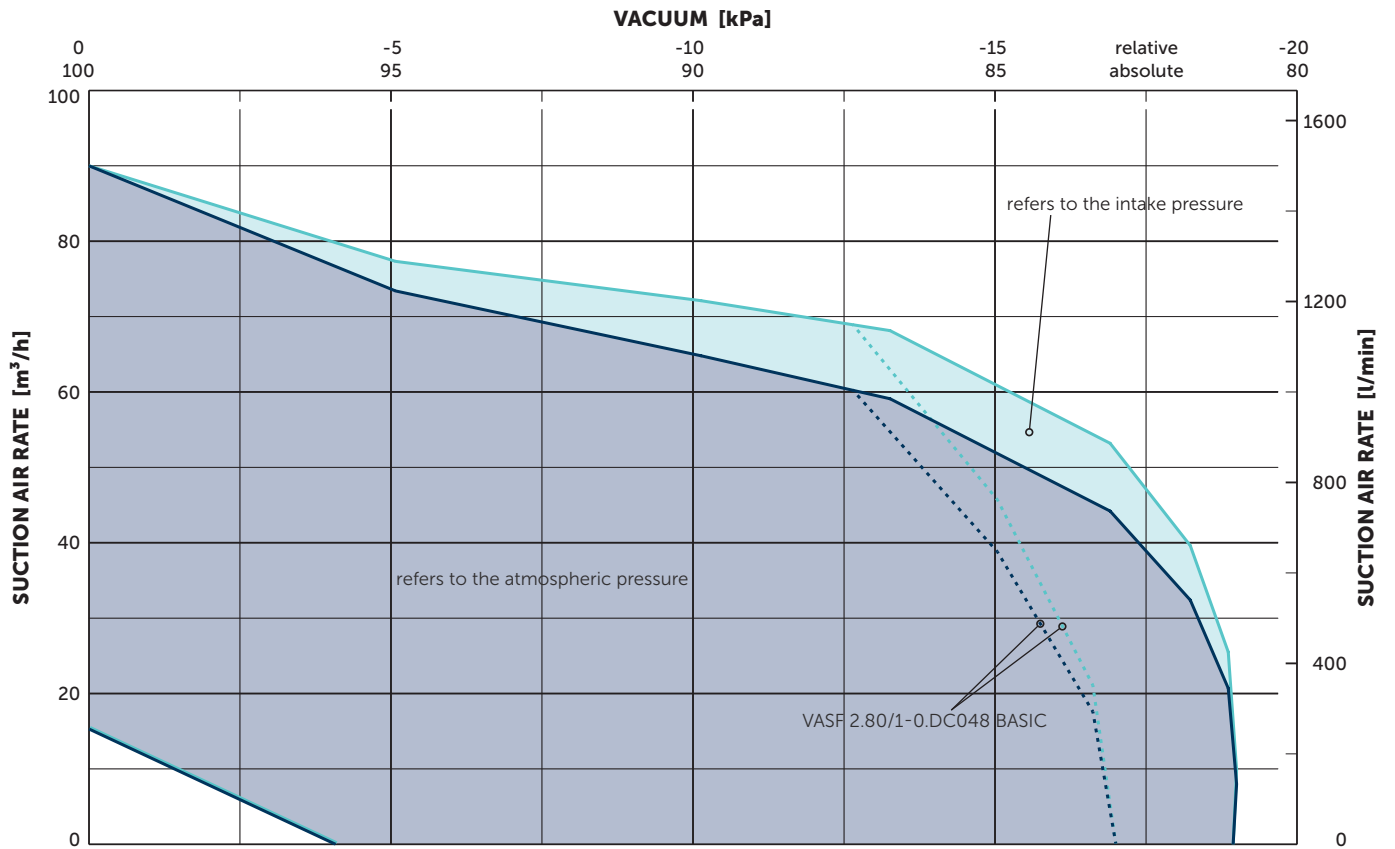


Reference data (atmosphere): 1000 mbar (100 kPa), 20°C (68°F)

Tolerance: $\pm 10\%$



Max. ambient temperature: $\leq 45^\circ\text{C}$ ($\leq 113^\circ\text{F}$)

FREQUENCY INVERTER AC 230 V


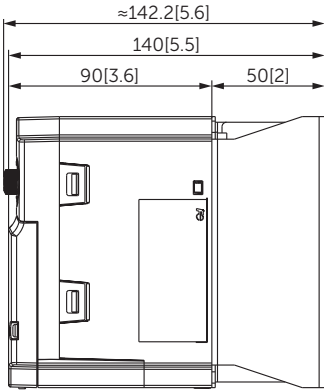
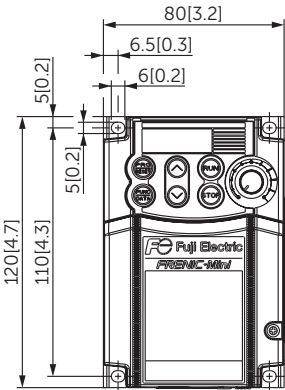


kg		
AC 230 V	AC 115 V	DC 48 V
0.9	1.3	1.6

FREQUENCY INVERTER AC 115 V

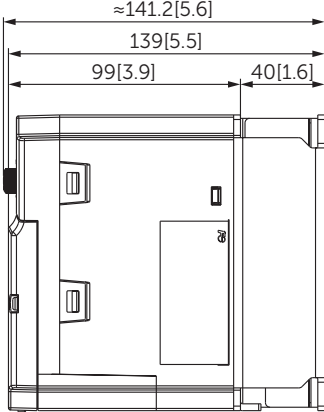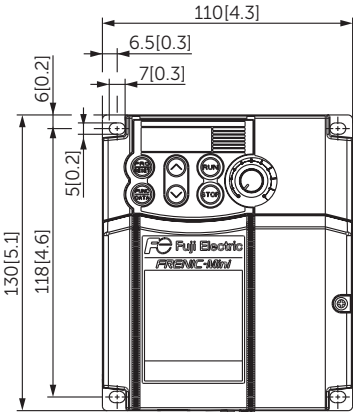



FREQUENCY INVERTER DC 48 V

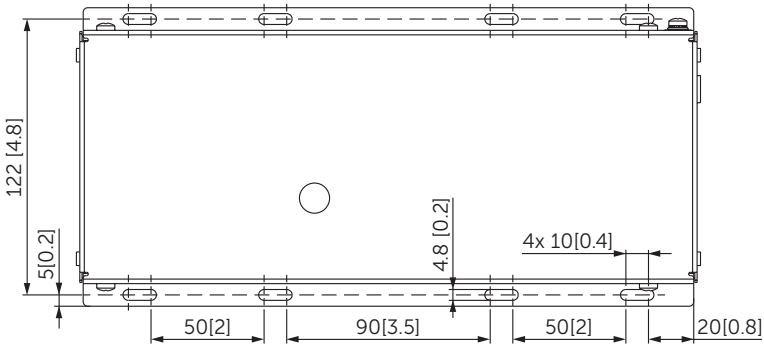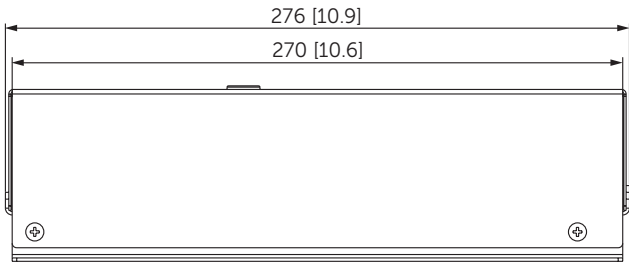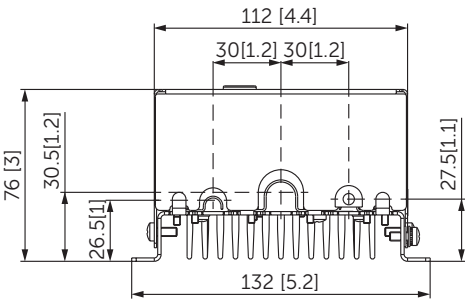



• For more information about the frequency inverters, see the instructions

+ VARIANTS AND ACCESSORIES

TYPE 2 – REAR CONNECTIONS

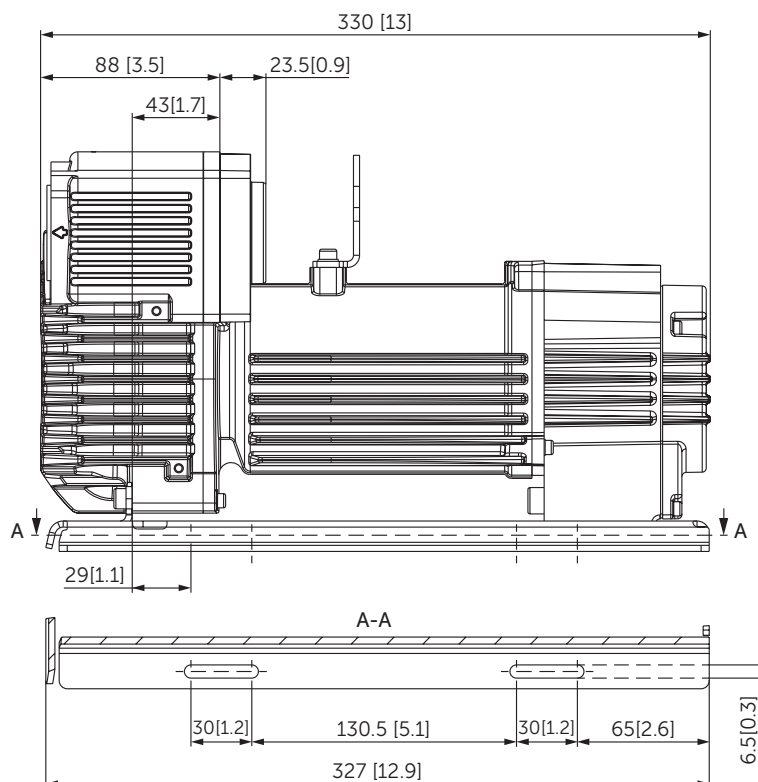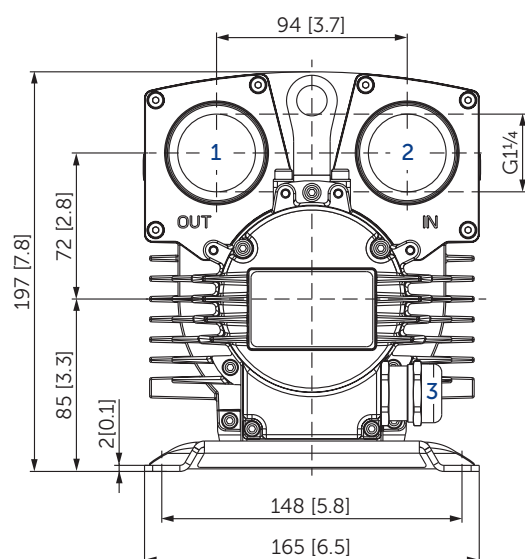


TYPE 3 – WITH SILENCERS

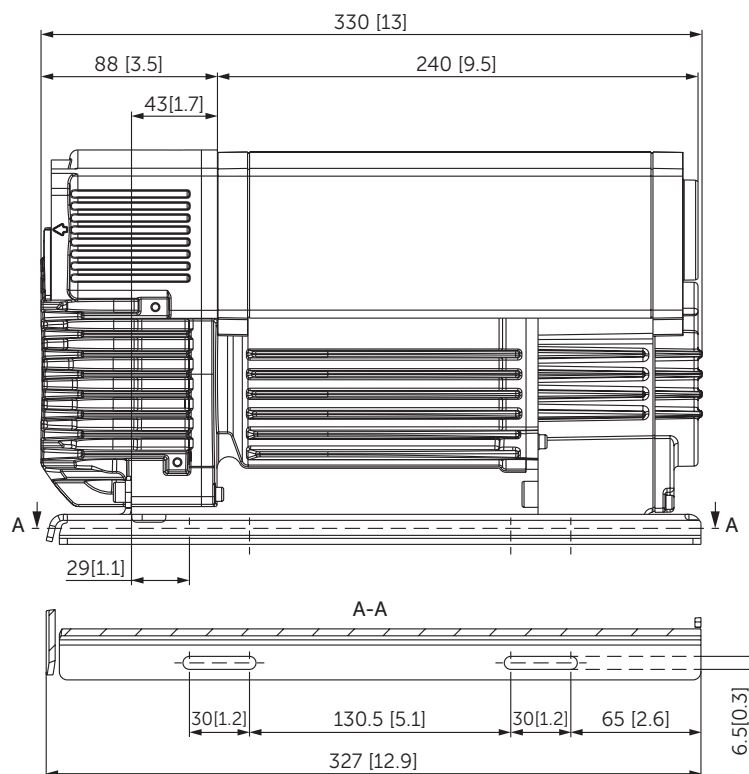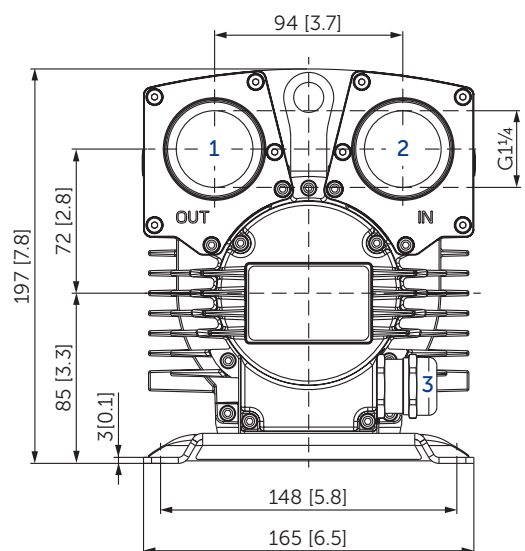

CABLE

AC WN211-267 (NO. 74202670000)

DC WN211-231 (NO. 74202310000)

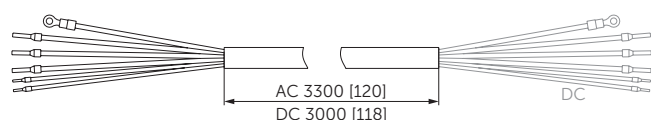

- 1 Vacuum connection (G 1 1/4)
- 2 Pressure connection (G 1 1/4)
- 3 SKINTOP MS-SC-M32x1.5 EMV
clamping range Ø 11–22 mm [0.4–0.9 inch]
- Dimensions in mm [inch]



MAKE IT BECKER.